


**Mechanical Data**


- Weight: 13.8000 grams (Approximate)
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

**Package 3D Photo**



Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

**Package Outline Dimensions**

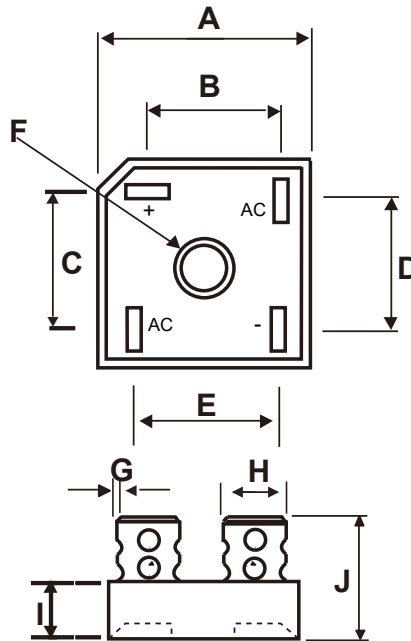

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.114	1.134	28.30	28.80	
B	0.634	0.673	16.10	17.10	
C	0.634	0.673	16.10	17.10	
D	0.543	0.583	13.80	14.80	
E	0.693	0.732	17.60	18.60	
F	0.197		5.00		Φ(Nom.)
G	0.030	0.034	0.76	0.86	
H	0.244	0.256	6.20	6.50	
I	0.291	0.335	7.40	8.50	
J	0.740	0.850	18.80	21.60	


## Packing Quantity

Package	Package Type	Minimum Packing Quantity	Carton Quantity
GBPC	Box	50	400

Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.


## Dimensions

### Inbox Size

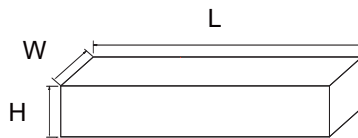

Description	Dimension	Specification(mm typical)
Length	L	205
Width	W	205
Height	H	45

### Carton Size

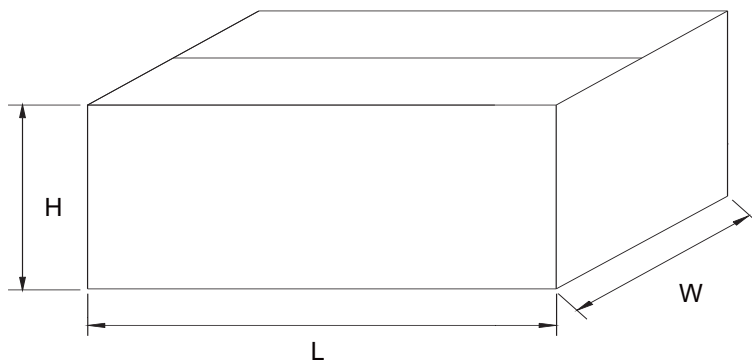

Description	Dimension	Specification(mm typical)
Length	L	435
Width	W	215
Height	H	210