


Mechanical Data


- Weight: 5.7640 grams (Approximate)
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ^(Note1) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Package 3D Photo



Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

Package Outline Dimensions

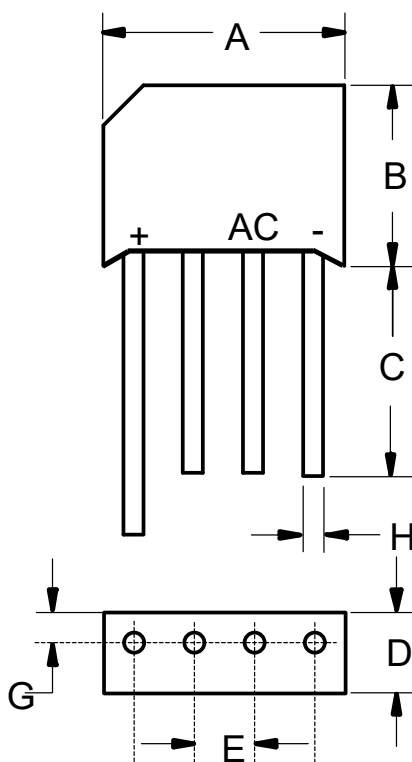

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.728	0.768	18.50	19.50	
B	0.600	0.640	15.20	16.30	
C	0.630	---	16.00	---	
D	0.217	0.256	5.50	6.50	
E	0.180	0.220	4.60	5.60	
G	---	0.083	---	2.10	
H	0.048	0.052	1.20	1.30	


Packing Quantity

Package	Package Type	Minimum Packing Quantity	Carton Quantity
RS-4L	Bulk	400	2000

Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.


Dimensions

Inbox Size

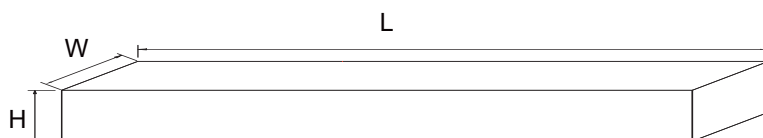

Description	Dimension	Specification(mm typical)
Length	L	250
Width	W	250
Height	H	50

Carton Size

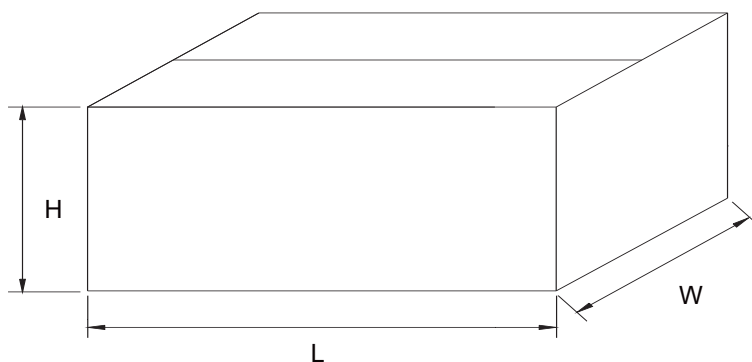

Description	Dimension	Specification(mm typical)
Length	L	275
Width	W	270
Height	H	290