

## Features

- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

## Maximum Ratings @ 25°C Unless Otherwise Specified

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 556°C/W Junction to Ambient<sup>(Note 2)</sup>
- Thermal Resistance: 357°C/W Junction to Ambient<sup>(Note 3)</sup>

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CBO</sub>	300	V
Collector-Emitter Voltage	V <sub>CEO</sub>	300	V
Emitter-Base Voltage	V <sub>EBO</sub>	6	V
Continuous Collector Current	I <sub>C</sub>	500	mA
Power Dissipation (Note 2)	P <sub>D</sub>	225	mW
Power Dissipation (Note 3)	P <sub>D</sub>	350	mW

Note:


1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

2. Device Mounted on FR-5 Board.


3. Device with Alumina Substrate.

## Marking: 1D

## **Internal Structure**




# NPN Silicon High Voltage Transistor

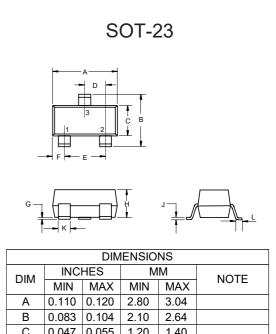

С	0.047	0.055	1.20	1.40	
D	0.034	0.041	0.85	1.05	
E	0.067	0.083	1.70	2.10	
F	0.018	0.024	0.45	0.60	
G	0.0004	0.006	0.01	0.15	
Н	0.035	0.043	0.90	1.10	
J	0.003	0.007	0.08	0.18	
K	0.012	0.020	0.30	0.51	
L	0.007	0.020	0.20	0.50	

## Suggested Solder Pad Layout






# Electrical Characteristics @ $T_A\!\!=\!\!25^\circ\!C$ Unless Otherwise Specified

Parameter	Symbol	Min	Тур	Мах	Units	Conditions
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	300			V	Ι <sub>C</sub> =100μΑ, Ι <sub>E</sub> =0
Collector-Emitter Breakdown Voltage*	V <sub>(BR)CEO</sub>	300			V	I <sub>C</sub> =1mA, I <sub>B</sub> =0
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	6			V	Ι <sub>E</sub> =100μΑ, Ι <sub>C</sub> =0
Collector Cutoff Current	I <sub>CBO</sub>			0.1	μA	V <sub>CB</sub> =200V, I <sub>E</sub> =0
Emitter Cutoff Current	I <sub>EBO</sub>			0.1	μA	$V_{EB}$ =6V, I <sub>C</sub> =0
	h <sub>FE(1)</sub>	25				V <sub>CE</sub> =10V, I <sub>C</sub> =1mA
DC Current Gain*	h <sub>FE(2)</sub>	40				V <sub>CE</sub> =10V, I <sub>C</sub> =10mA
	h <sub>FE(3)</sub>	40				V <sub>CE</sub> =10V, I <sub>C</sub> =30mA
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>			0.5	V	I <sub>C</sub> =20mA, I <sub>B</sub> =2mA
Base-Emitter Saturation Voltage	V <sub>BE(sat)</sub>			0.9	V	I <sub>C</sub> =20mA, I <sub>B</sub> =2mA
Transition Frequency	f <sub>T</sub>	50			MHz	V <sub>CE</sub> =20V, I <sub>C</sub> =10mA, f=100MHz
Collector output Capacitance	C <sub>cb</sub>			3	pF	V <sub>CB</sub> =20V, I <sub>E</sub> =0,f=1MHz

\*.Pulse test: Pulse Width≤300µs,Duty Cycle≤2.0%.



# **Curve Characteristics**

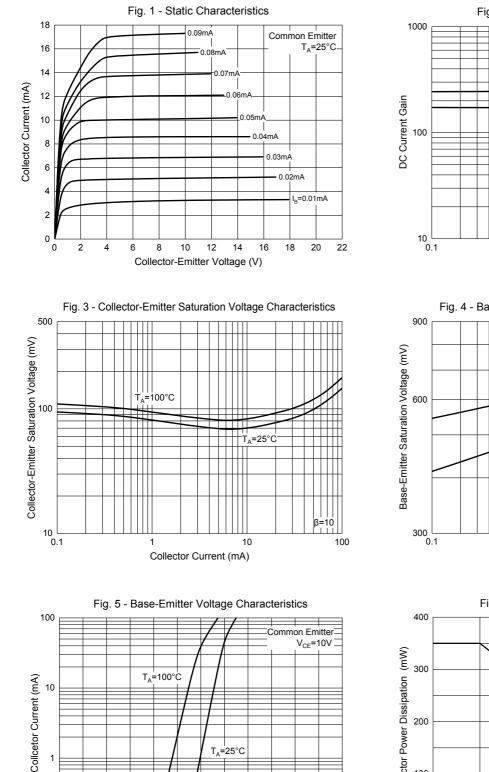

T<sub>A</sub>=25°C

0.8

1.0

0.6

Base-Emitter Voltage (V)

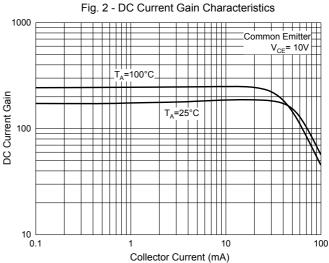


Fig. 4 - Base-Emitter Saturation Voltage Characteristics


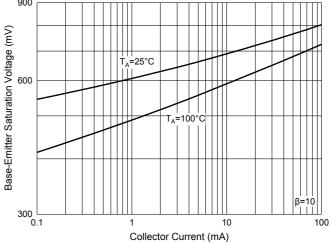


Fig. 6 - Collector Power Derating Curve

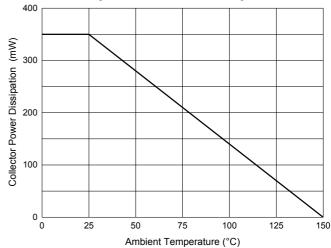

1

0.1 └─ 0.0

0.2

0.4

1.2



## **Ordering Information**

Device		Packing
Part Number-TP		Tape&Reel: 3Kpcs/Reel

## \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

## \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

## \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.